


CVLSH06 55" LED CPU Stand Touch Screen Signage

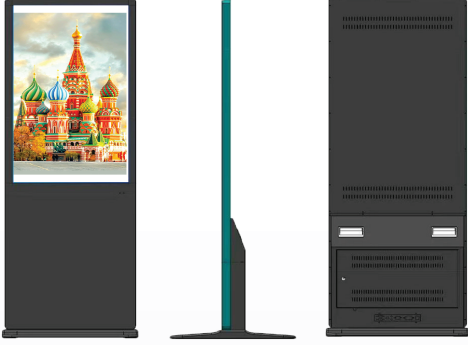

Stand Type Signage Touch Screen

Intelligent Touch

Interactive Smart Touch Panel is an intelligence touch control device which is developed at basic of large screen display and infrared touch control technology. The device integrates TV, computer, android system and other function for education, business and public services.

Smooth Touch

Support up to 10 point touch writing, smooth and fast feedback.

High Operation System

Build in Windows as operation system.

Multiple Ports Design

Unrivaled Quality, Power Saving and Safety

High Quality Assurance, friendly using-experience

- International brand LED HD display panel configured to ensure better display quality and lower power consumption.


Intelligent Releasing and Interaction Integration System.

- Touching the screen to inquire and read any information as you want. It is very convenient for real-time news released and advertised.

Touch Support, sensitive input identification

- 10 point infrared touch technology links to fast response speed, strong light resistance and drive free features contribute to quite sensitive input identification.

Machine Size Chart- Unit (mm)

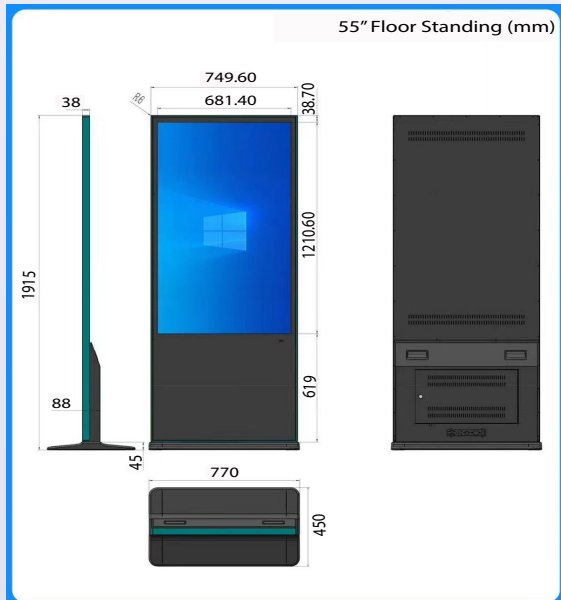

Specifications (CPU)

	Model	CVLSH06
Panel	Screen Size	55" (16:9)
	Backlight / Lightsource	LED
	Resolution (Pixels)	1920 x 1080 pixels
	Brightness (Typical)	350cd/m2
	Contrast Ratio (Typical)	3,000:1
	Viewing Angle (Horizontal/Vertical)	178°/178°
	Response Time (ms)	15ms
	Working Temp.	0-50C
	Panel Bit (8 or 10)	8 bit
	Light Life (Typical)	80,000 hours
Glass	Refresh Rate	60Hz
	Tempered Glass	4mm, Tempered Glass
Touch	No. Of Touches	Unlimited
	Positioning Accuracy	More Than 90% of touch area +-2mm
	Touch Technology	IR Touch
	Numbers of Touch	10 Point touch
	Resolution (Points Area Function)	32,767*32,767
	Touch Interface	USB type B
Audio	OS Supported	CPU Intel i5 Gen 6, 4GB RAM, 12GB SSD
	Internal Speaker	5Wx2
Connectivity	AC Power	
	Power (AC) Input	x1
	Power Switch	x1
	Basic IO	
	Legacy IO	
	SIM Card	NA
	USB Player (Photo, Video)	x2
	RS232 Input	NA
	RJ45 Port	x1
	Firmware Update	USB/OTA
Control	Voltage	100V-240V, 50/60Hz
	Typical (Watt)	<130W
Mechanical	Overall Dimension	770 x 1210.6 x 450
	Shell & Appearance	Aluminium Frame, Front Panel Glass
	Handle	N/A
	Pen Tray	NA
RF	NFC Reader / Writer	NA
OSD	On-Screen Display Languages	English
Package / Accessory	Remote Controller	NA
	Power Cord	x1 (1.5m)
	Audio Cable	N/A
	VGA Cable	N/A
	Quick Start Guide	NA
	User's Manual Electronic File	x1
	WiFi Antenna	x1
	Touch Pen (Stylus)	NA
	Certificate	x1
	Optional	Windows Licence
Embedded anti glare glass		Yes
Android motherboard		Yes
Slot-in-PC		NA
Embedded Camera	NA	

Dealer's Stamp