

# CVLSH04 55" LED Stand Touch Screen Signage



## Stand Type Signage Touch Screen

### Intelligent Touch

Interactive Stand Type Signage is an intelligence touch control device which is developed as Intelligent Information dissemination terminal. The device can support an element of display such picture, video, audio, subtitle, date, time, weather, web page, HTML, word, excel, PPT, PDF, flash, RSS and other android platform program.

### Smooth Touch

Support up to 10 point touch writing, smooth and fast feedback.

### High Operation System

Build in Android as operation system.

### Multiple Ports Design

## Unrivaled Quality, Power Saving and Safety

### High Quality Assurance, friendly using-experience

- International brand LED HD display panel configured to ensure better display quality and lower power consumption.


### Intelligent Releasing and Interaction Integration System.

- Touching the screen to inquire and read any information as you want. It is very convenient for real-time news released and advertised.

### Touch Support, sensitive input identification

- 10 point infrared touch technology links to fast response speed, strong light resistance and drive free features contribute to quite sensitive input identification.

## Machine Size Chart- Unit (mm)

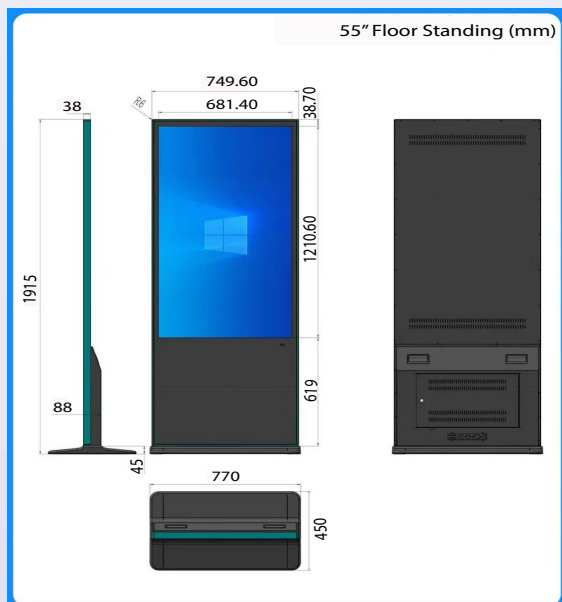

## Specifications (4+32GB)

	Model	CVLSH04	
Panel	Screen Size	55" (16:9)	
	Backlight / Lightsource	LED	
	Resolution (Pixels)	1920 x 1080 pixels	
	Brightness (Typical)	350cd/m2	
	Contrast Ratio (Typical)	4,000:1	
	Viewing Angle (Horizontal/Vertical)	178°/178°	
	Response Time (ms)	15ms	
	Working Temp.	0-50C	
	Panel Bit (8 or 10)	8 bit	
	Light Life (Typical)	80,000 hours	
Glass	Refresh Rate	60Hz	
	Tempered Glass	4mm, Tempered Glass	
Touch	No. Of Touches	Unlimited	
	Positioning Accuracy	More Than 90% of touch area +-2mm	
	Touch Technology	IR Touch	
	Numbers of Touch	10 Point touch	
	Resolution (Points Area Function)	32,767*32,767	
	Touch Interface	USB type B	
	OS Supported	Android 8.0, RK3288 Eight Core, 4G RAM, 32G onboard storage, network and display card	
Audio	Internal Speaker	5Wx2	
Connectivity	AC Power		
	Power (AC) Input	x1	
	Power Switch	x1	
	Basic IO		
	Legacy IO		
	SIM Card	NA	
	USB Player (Photo, Video)	x2	
	Control	RS232 Input	NA
		RJ45 Port	x1
		Firmware Update	USB/OTA
Power	Voltage	100V-240V, 50/60Hz	
	Typical (Watt)	<130W	
Mechanical	Overall Dimension	792 x 1923.99 x 58.61mm	
	Shell & Appearance	Aluminium Frame, Front Panel Glass	
	Handle	N/A	
	Pen Tray	NA	
RF	NFC Reader / Writer	NA	
OSD	On-Screen Display Languages	English	
Package / Accessory	Remote Controller	NA	
	Power Cord	x1 (1.5m)	
	Audio Cable	N/A	
	VGA Cable	N/A	
	Quick Start Guide	NA	
	User's Manual Electronic File	x1	
	WIFI Antenna	x1	
	Touch Pen (Stylus)	NA	
Certificate	x1		
Optional	Windows Licence	NA	
	Embedded anti glare glass	Yes	
	Android motherboard	Yes	
	Slot-in-PC	NA	
	Embedded Camera	NA	

Dealer's Stamp

