DS-D41Q15CA-1PH
P1.53, 320 mm × 160 mm, Indoor LED



- Supports seamless image stitching in any direction, size and shape and displays stitched images uniformly and consistently without black lines
- Uses the ultra-high refresh rate to display delicate and smooth video images
- Uses the broadcast grayscale processing to show more image details
- High brightness and high contrast

▪ Specification

Model		DS-D41Q15CA-1PH
Product Model	Product Model	DS-D41Q15CA-1PH
Module	Pixel Configuration	SMD
	Pixel Pitch	1.538 mm
	Lamp Bead Dimensions	1212
	Dimensions of Module	320 mm × 160 mm
	Module Resolution	208 × 104
	Pixel Density	422500
	Signal Source Interface	HUB320
Display	White Balance Brightness	550 nits
	Color Temperature	3000K to 10000K adjustable
	Viewing Angle	160° (H)/160° (V)
	Brightness Uniformity	≥ 97%
	Color Uniformity	≤ ± 0.003Cx, Cy
	Contrast Ratio	3000:1
	Refresh Rate	3840 Hz
Processing Performance	Scanning Amount	52
	Grey Level	Up to 16 bit
Power	Max. Consumption	≤ 600 W/m^2
	Average Consumption	< 290 W/m^2
	Input Voltage	DC: 4.5 V to 5 V
General	Package Dimensions (W × H × D)	673 (W) mm × 248 (H) mm × 390 (D) mm (26.50'' × 9.76'' × 15.35'') (20 cabinets in 1 box)
	Packing List	Several high magnetic brackets Several LED lamp beads and IC components Several signal cables and power cables
	Gross Weight	0.55 kg (1.21 lb)
	Net Weight	0.48 kg (1.06 lb)
Working Environment	Working Temperature	-10 °C to 40 °C (14 °F to 104 °F)
	Working Humidity	10% RH to 80% RH (without condensation)
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
	Storage Humidity	10% RH to 85% RH (without condensation)

▪ Available Model

DS-D41Q15CA-1PH

▪ Dimension

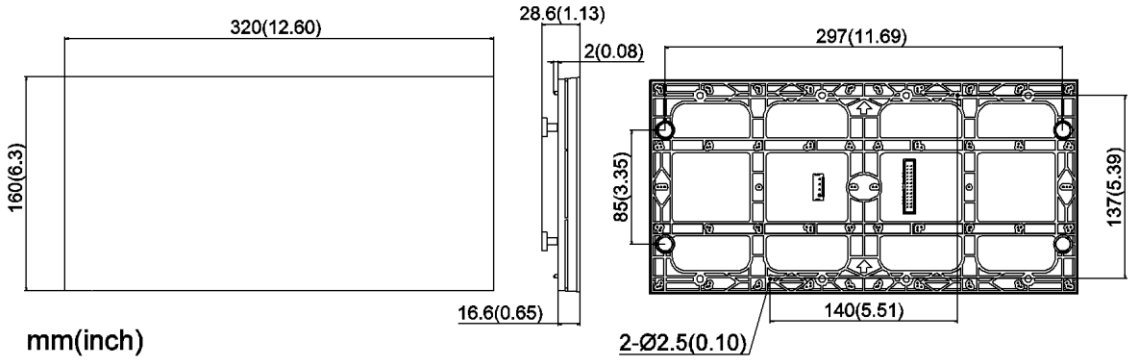

Headquarters
No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com

Follow us on social media to get the latest product and solution information.

Hikvision HikvisionHQ HikvisionHQ Hikvision_Global Hikvision Corporate Channel hikvisionhq

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.